


AL30 – PP / PVC / PVDF

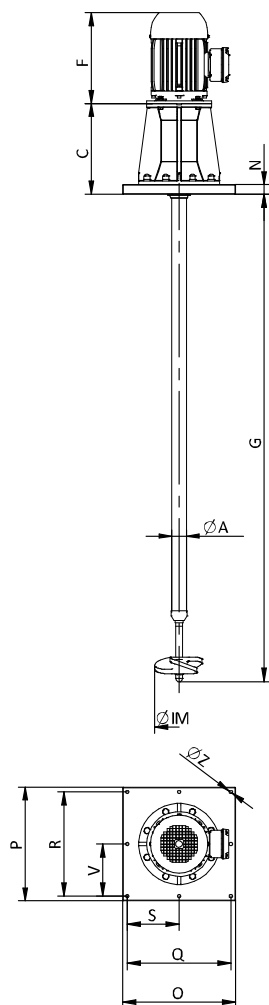

Motore – Motor

kW	Poles	IEC Frame	rpm	F*	kg*
0,55	4	80	1450	240	15
0,75	4	80	1450	240	15
0,37	6	80	950	240	10,5
0,55	6	80	950	240	14
0,18	8	80	700	240	11,5
0,25	8	80	700	240	13,5

IEC 72 – 1

Agitatore – Mixer

Poles	C	G _{min}	G _{max} 50Hz	G _{max} 60Hz	ØIM	N	ØS	kg*
4	280	500	1100	1000	132	30	45	19
6	280	500	1350	1250	132	30	45	19
8	280	500	1550	1400	132	30	45	19

ISO 22768 – c


Flangia appoggio – Base plate

Poles	O	P	Q	R	S	V	ØZ
4	350	350	320	320	160	160	10,5
6	350	350	320	320	160	160	10,5
8	350	350	320	320	160	160	10,5

ISO 22768 – c

*Suscettibile di variazione – *subject to variation*

AL40 – PP / PVC / PVDF

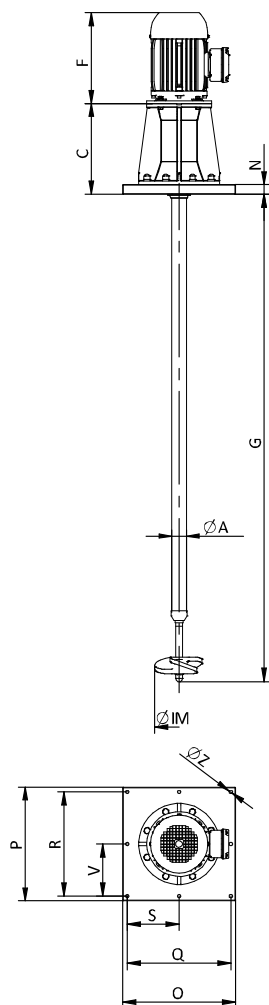

Motore – Motor

kW	Poles	IEC Frame	rpm	F*	kg*
1,1	4	90S	1450	260	21
1,5	4	90L	1450	280	22
0,75	6	90S	950	260	19
1,1	6	90L	950	280	23
0,37	8	90S	700	260	18
0,55	8	90L	700	280	22

IEC 72 – 1

Agitatore – Mixer

Poles	C	G _{min}	G _{max} 50Hz	G _{max} 60Hz	øIM	N	øA	kg*
4	280	500	1100	1000	150	30	45	19
6	280	500	1350	1250	150	30	45	19
8	280	500	1550	1400	150	30	45	19

ISO 22768 – c


Flangia appoggio – Base plate

Poles	O	P	Q	R	S	V	øZ
4	350	350	320	320	160	160	10,5
6	350	350	320	320	160	160	10,5
8	350	350	320	320	160	160	10,5

ISO 22768 – c

*Suscettibile di variazione – *subject to variation*

AL50 – PP / PVC / PVDF

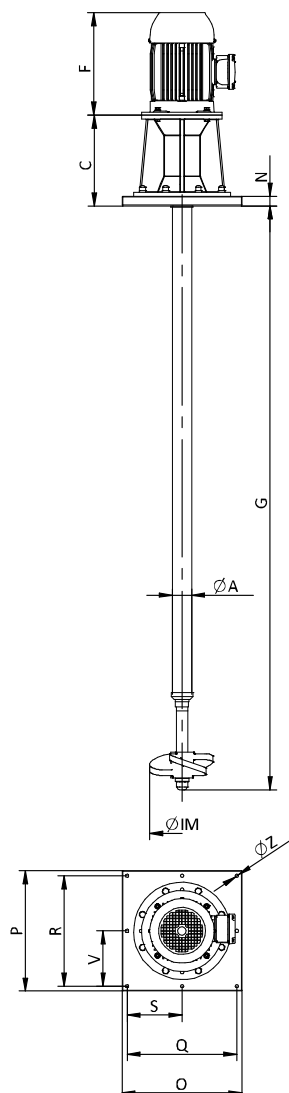

Motore – Motor

kW	Poles	IEC Frame	rpm	F*	kg*
4	4	112M	1450	340	43
1,5	6	100L	950	320	28,5
2,2	6	112M	950	340	38
0,75	8	100L	700	320	28,5
1,1	8	100L	700	320	30,5
1,5	8	112M	700	340	39

IEC 72 – 1

Agitatore – Mixer

Poles	C	G _{min}	G _{max} 50Hz	G _{max} 60Hz	øIM	N	øA	kg*
4	280	500	1200	1100	200	30	50	23
6	280	500	1500	1350	200	30	50	23
8	280	500	1750	1600	200	30	50	23

ISO 22768 – c


Flangia appoggio – Base plate

Poles	O	P	Q	R	S	V	øZ
4	370	370	340	340	170	170	10,5
6	370	370	340	340	170	170	10,5
8	370	370	340	340	170	170	10,5

ISO 22768 – c

*Suscettibile di variazione – *subject to variation*

AL80 – PP / PVC / PVDF

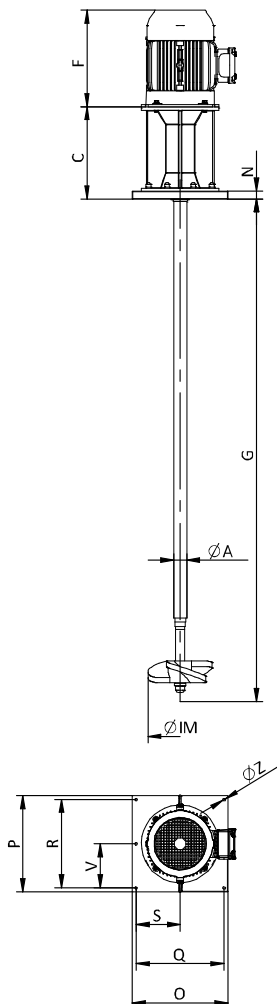

Motore – *Motor*

kW	Poles	IEC Frame	rpm	F*	kg*
4	6	132M	950	410	67
5,5	6	132M	950	410	78
2,2	8	132S	700	375	66
3	8	132M	700	410	74

IEC 72 – 1

Agitatore – *Mixer*

Poles	C	G _{min}	G _{max} 50Hz	G _{max} 60Hz	øIM	N	øS	kg*
6	325	750	1650	1500	250	30	60	31
8	325	750	1900	1750	250	30	60	31

ISO 22768 – c

Flangia appoggio – *Base plate*

Poles	O	P	Q	R	S	V	øZ
4	370	370	340	340	170	170	10,5
6	370	370	340	340	170	170	10,5
8	370	370	340	340	170	170	10,5

ISO 22768 – c

*Suscettibile di variazione – *subject to variation*