


AL40 – PP / PVC / PVDF

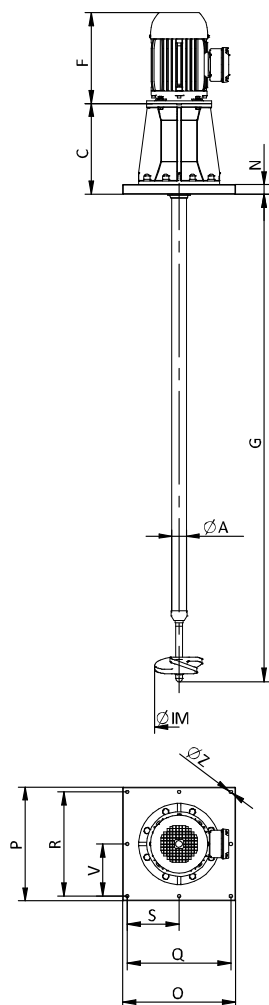

Motore – *Motor*

kW	Poles	IEC Frame	rpm	F*	kg*
1,1	4	90S	1450	260	21
1,5	4	90L	1450	280	22
0,75	6	90S	950	260	19
1,1	6	90L	950	280	23
0,37	8	90S	700	260	18
0,55	8	90L	700	280	22

IEC 72 – 1

Agitatore – *Mixer*

Poles	C	G _{min}	G _{max} 50Hz	G _{max} 60Hz	øIM	N	øA	kg*
4	280	500	1100	1000	150	30	45	19
6	280	500	1350	1250	150	30	45	19
8	280	500	1550	1400	150	30	45	19

ISO 22768 – c


Flangia appoggio – *Base plate*

Poles	O	P	Q	R	S	V	øZ
4	350	350	320	320	160	160	10,5
6	350	350	320	320	160	160	10,5
8	350	350	320	320	160	160	10,5

ISO 22768 – c

*Suscettibile di variazione – *subject to variation*

AL40 – PP / PVC / PVDF

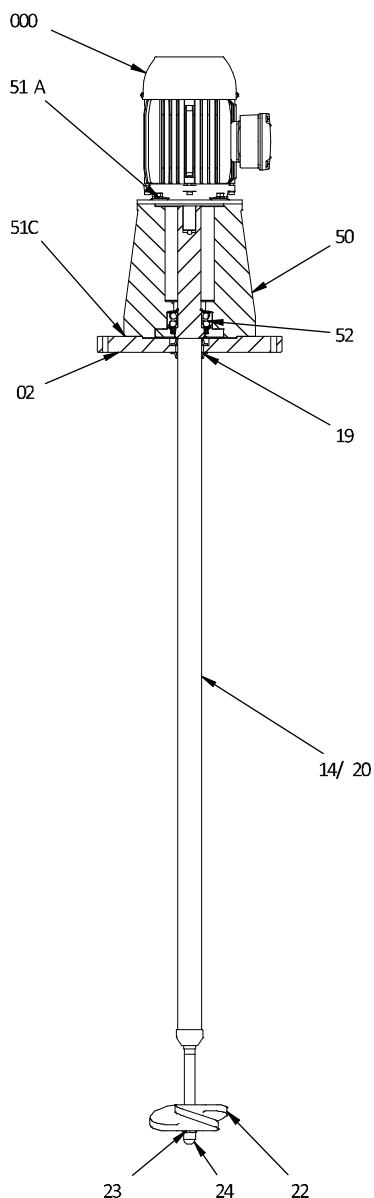

Codice <i>Part-No.</i>	Denominazione <i>Designation</i>	Qt.
000	Motore <i>Motor</i>	1
02	Flangia di appoggio <i>Support plate</i>	1
14/20	Albero completo <i>Complete shaft</i>	1
19	Deflettore <i>Baffle</i>	1
22	Girante <i>Impeller</i>	1
23	Rondella girante <i>Impeller washer</i>	1
24	Dado girante <i>Impeller nut</i>	1
50	Lanterna <i>Support lantern</i>	1
51A/51C	Serie Bulloneria/Rondelle <i>Nuts/Bolts/Washers Set</i>	1
52	Cuscinetto <i>Ball Bearing</i>	1

OPZIONI MATERIALI – MATERIAL OPTIONS

Girante <i>Impeller</i>	PP - PVC - PVDF - PEHD
Albero <i>Shaft</i>	SS rivestito in PP - PVC - PVDF <i>SS covered in PP - PVC - PVDF</i>
Bulloneria <i>Bolts and nuts</i>	SS - BR rivestiti in PP - PVC - PVDF <i>SS - BR covered in PP - PVC - PVDF</i>