


AN05 – PP / PVC / PVDF



Motore – Motor


kW	Poles	IEC Frame	rpm	F*	kg*
0,09	4	56	1450	180	4

IEC 72 – 1

Agitatore – Mixer

Poles	C	G _{min}	G _{max} 50Hz	G _{max} 60Hz	ØIM	N	ØA	kg*
4	-	150	700	600	50	-	22	1,5

ISO 22768 – c

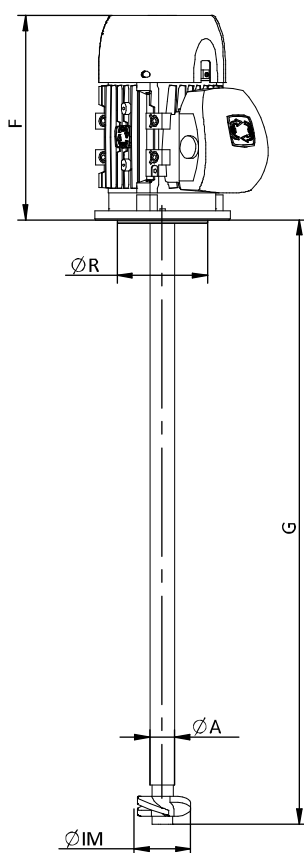


Flangia motore – Motor flange

Poles	O	ØP	ØQ	ØR	ØZ
4	-	120	100	80	7

ISO 22768 – c

*Suscettibile di variazione – *subject to variation*

AN07 – PP / PVC / PVDF



Motore – Motor


kW	Poles	IEC Frame	rpm	F*	kg*
0,09	4	56	1450	180	4

IEC 72 – 1

Agitatore – Mixer

Poles	C	G _{min}	G _{max} 50Hz	G _{max} 60Hz	ØIM	N	ØA	kg*
4	-	150	700	600	70	-	22	1,5

ISO 22768 – c

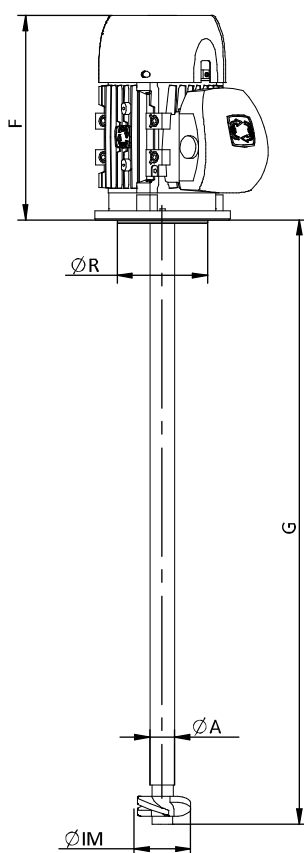



Flangia motore – Motor flange

Poles	O	ØP	ØQ	ØR	ØZ
4	-	120	100	80	7

ISO 22768 – c

*Suscettibile di variazione – *subject to variation*

AN10 – PP / PVC / PVDF

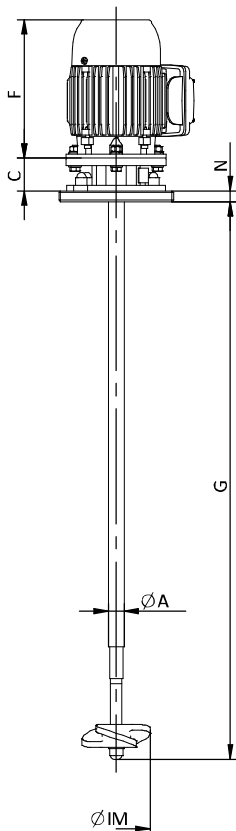

Motore – *Motor*

kW	Poles	IEC Frame	rpm	F*	kg*
0,12	4	63	1450	200	7
0,18	4	63	1450	200	7,2
0,12	6	63	950	200	7,2

IEC 72 – 1

Agitatore – *Mixer*

Poles	C	G _{min}	G _{max} 50Hz	G _{max} 60Hz	ØIM	N	ØA	kg*
4	45	250	700	600	95	15	22	1,5
6	45	250	850	800	95	15	22	1,5

ISO 22768 – c


Flangia appoggio – *Base plate*

Poles	O	P	Q	R	ØZ
4	160	160	140	140	10,5
6	160	160	140	140	10,5

ISO 22768 – c

*Suscettibile di variazione – *subject to variation*

AN20 – PP / PVC / PVDF

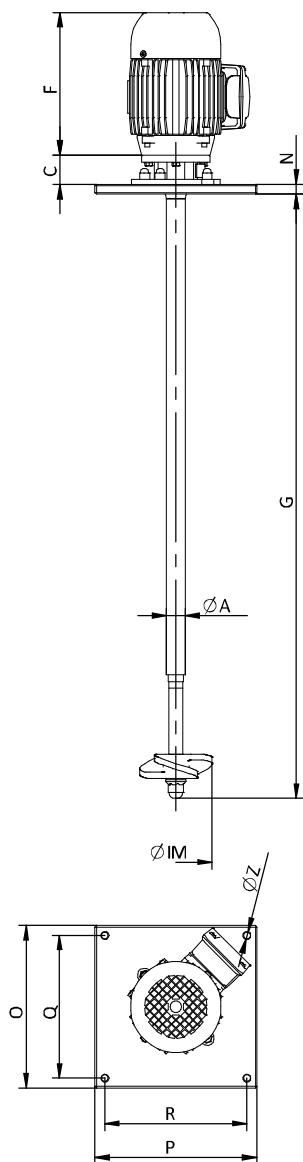

Motore – *Motor*

kW	Poles	IEC Frame	rpm	F*	kg*
0,25	4	71	1450	220	10,2
0,37	4	71	1450	220	11
0,18	6	71	950	220	9,5
0,25	6	71	950	220	11,5

IEC 72 – 1

Agitatore – *Mixer*

Poles	C	G _{min}	G _{max} 50Hz	G _{max} 60Hz	ØIM	N	ØA	ØZ	kg*
4	60	250	800	700	112	15	29	10,5	2
6	60	250	1000	900	112	15	29	10,5	2

ISO 22768 – c


Flangia appoggio – *Base plate*

Poles	O	P	Q	R	ØZ
4	250	250	220	220	10,5
6	250	250	220	220	10,5

ISO 22768 – c

*Suscettibile di variazione – *subject to variation*

AN30 – PP / PVC / PVDF

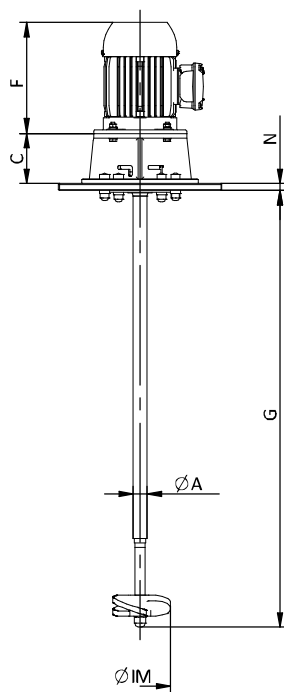

Motore – Motor


kW	Poles	IEC Frame	rpm	F*	kg*
0,55	4	80	1450	240	15
0,75	4	80	1450	240	15
0,37	6	80	950	240	10,5
0,55	6	80	950	240	14
0,18	8	80	700	240	11,5
0,25	8	80	700	240	13,5

IEC 72 – 1

Agitatore – Mixer

Poles	C	G _{min}	G _{max} 50Hz	G _{max} 60Hz	ØIM	N	ØA	ØZ	kg*
4	125	250	750	650	132	15	29	10,5	4,5
6	125	250	950	850	132	15	29	10,5	4,5
8	125	250	1100	1000	132	15	29	10,5	4,5

ISO 22768 – c




Flangia appoggio – Base plate

Poles	O	P	Q	R	S	V	ØZ
4	350	350	320	320	160	160	10,5
6	350	350	320	320	160	160	10,5
8	350	350	320	320	160	160	10,5

ISO 22768 – c

*Suscettibile di variazione – *subject to variation*

AN40 – PP / PVC / PVDF

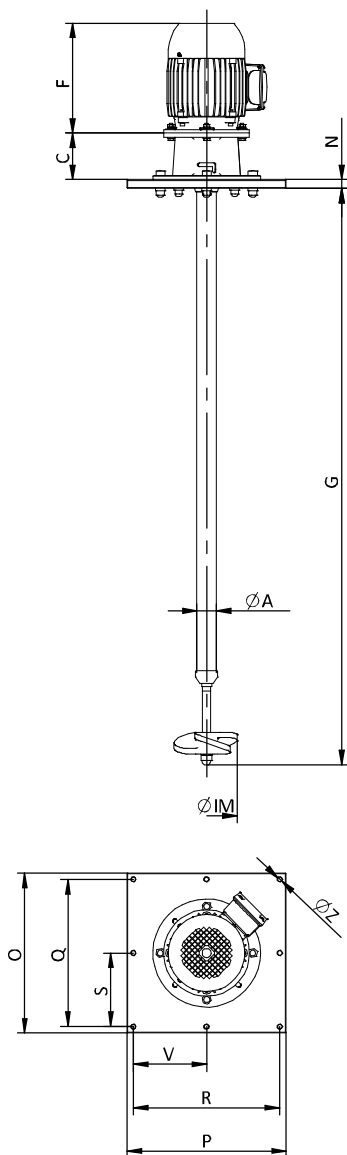

Motore – Motor

kW	Poles	IEC Frame	rpm	F*	kg*
1,1	4	90S	1450	260	21
1,5	4	90L	1450	280	22
0,75	6	90S	950	260	19
1,1	6	90L	950	280	23
0,37	8	90S	700	260	18
0,55	8	90L	700	280	22

IEC 72 – 1

Agitatore – Mixer

Poles	C	G _{min}	G _{max} 50Hz	G _{max} 60Hz	ØIM	N	ØA	ØZ	kg*
4	125	250	1000	900	150	20	45	10,5	7,5
6	125	250	1200	1100	150	20	45	10,5	7,5
8	125	250	1500	1300	150	20	45	10,5	7,5

ISO 22768 – c


Flangia appoggio – Base plate

Poles	O	P	Q	R	S	V	ØZ
4	370	370	340	340	170	170	10,5
6	370	370	340	340	170	170	10,5
8	370	370	340	340	170	170	10,5

ISO 22768 – c

*Suscettibile di variazione – *subject to variation*

AN10 – SS

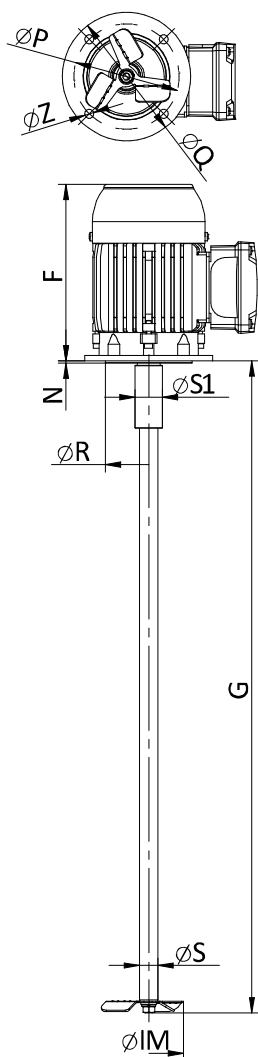

Motore – Motor

kW	Poles	IEC Frame	rpm	F*	N	ØP	ØQ	ØR	ØZ*	kg*
0,12	4	63	1450	200	3	115	140	95	10	7
0,18	4	63	1450	200	3	115	140	95	10	7,2
0,12	6	63	950	200	3	115	140	95	10	7,2

IEC 72 – 1


Agitatore – Mixer

Poles	G _{min}	G _{max} 50Hz	G _{max} 60Hz	ØIM	ØS	ØS1	kg*
4	150	650	600	95	20	30	2
6	150	800	750	95	20	30	2,5

ISO 22768 – c

*Suscettibile di variazione – *subject to variation*

AN20 – SS

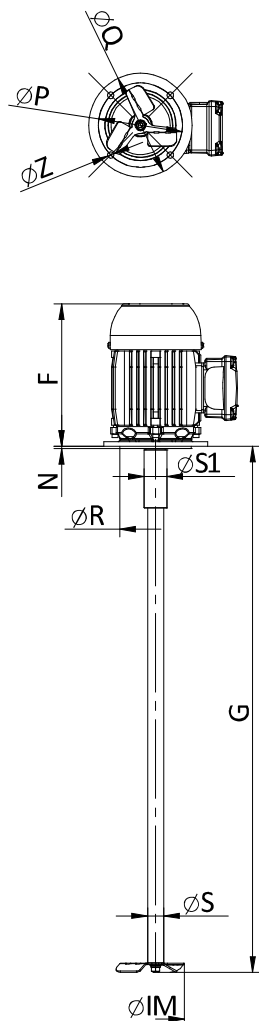

Motore – Motor

kW	Poles	IEC Frame	rpm	F*	N	ØP	ØQ	ØR	ØZ*	kg*
0,25	4	71	1450	220	3.5	130	160	110	10	10,2
0,37	4	71	1450	220	3.5	130	160	110	10	11
0,18	6	71	950	220	3.5	130	160	110	10	9,5
0,25	6	71	950	220	3.5	130	160	110	10	11,5

IEC 72 – 1


Agitatore – Mixer

Poles	G _{min}	G _{max} 50Hz	G _{max} 60Hz	ØIM	ØS	ØS1	kg*
4	200	750	650	112	25	35	3,5
6	200	900	850	112	25	35	4

ISO 22768 – c

*Suscettibile di variazione – *subject to variation*

AN30 – SS

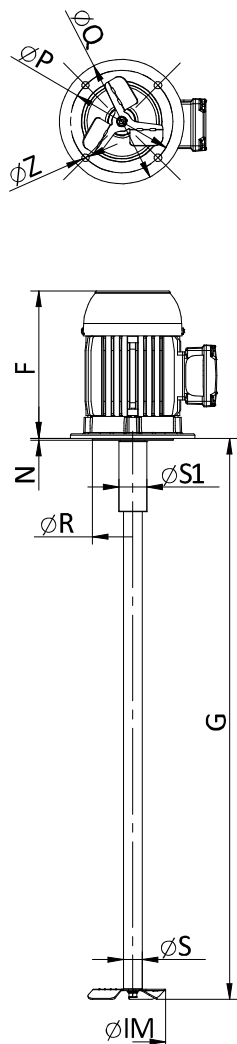

Motore – Motor

kW	Poles	IEC Frame	rpm	F*	N	ØP	ØQ	ØR	ØZ*	kg*
0,55	4	80	1450	240	3,5	165	200	130	12	15
0,75	4	80	1450	240	3,5	165	200	130	12	15
0,37	6	80	950	240	3,5	165	200	130	12	10,5
0,55	6	80	950	240	3,5	165	200	130	12	14
0,18	8	80	700	240	3,5	165	200	130	12	11,5
0,25	8	80	700	240	3,5	165	200	130	12	13,5

IEC 72 – 1


Agitatore – Mixer

Poles	G _{min}	G _{max} 50Hz	G _{max} 60Hz	ØIM	ØS	ØS1	kg*
4	250	850	750	132	30	45	6
6	250	1000	900	132	30	45	6,5
8	250	1100	1050	132	30	45	7,5

ISO 22768 – c

*Suscettibile di variazione – *subject to variation*

AN40 – SS

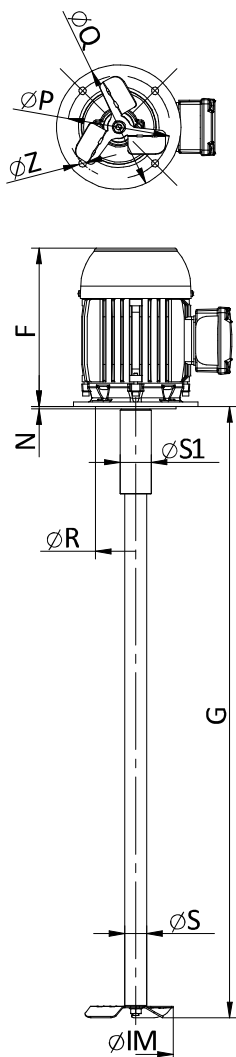

Motore – Motor

kW	Poles	IEC Frame	rpm	F*	N	ØP	ØQ	ØR	ØZ*	kg*
1,1	4	90S	1450	260	3,5	165	200	130	12	21
1,5	4	90L	1450	280	3,5	165	200	130	12	22
0,75	6	90S	950	260	3,5	165	200	130	12	19
1,1	6	90L	950	280	3,5	165	200	130	12	23
0,37	8	90S	700	260	3,5	165	200	130	12	18
0,55	8	90L	700	280	3,5	165	200	130	12	22

IEC 72 – 1


Agitatore – Mixer

Poles	G _{min}	G _{max} 50Hz	G _{max} 60Hz	ØIM	ØS	ØS1	kg*
4	300	900	800	150	35	50	8,5
6	300	1100	1000	150	35	50	10
8	300	1250	1150	150	35	50	10,5

ISO 22768 – c

*Suscettibile di variazione – *subject to variation*

AN50 – SS

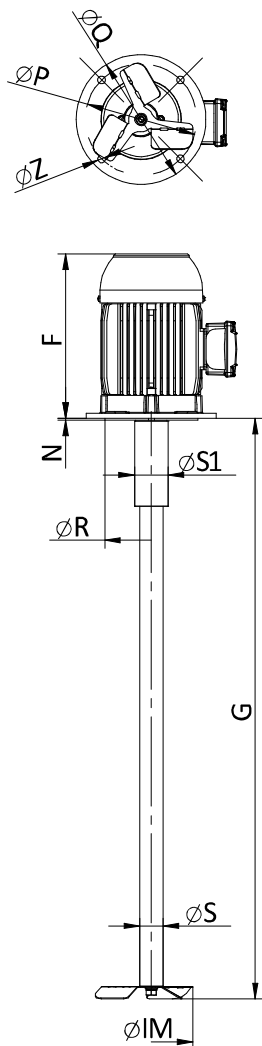

Motore – Motor

kW	Poles	IEC Frame	rpm	F*	N	ØP	ØQ	ØR	ØZ*	kg*
4	4	112M	1450	340	4	215	250	180	15	43
1,5	6	100L	950	320	4	215	250	180	15	28,5
2,2	6	112M	950	340	4	215	250	180	15	38
0,75	8	100L	700	320	4	215	250	180	15	28,5
1,1	8	100L	700	320	4	215	250	180	15	30,5
1,5	8	112M	700	340	4	215	250	180	15	39

IEC 72 – 1

Agitatore – Mixer

Poles	G _{min}	G _{max} 50Hz	G _{max} 60Hz	ØIM	ØS	ØS1	kg*
4	350	1000	900	200	45	65	17
6	350	1200	1100	200	45	65	19,5
8	350	1400	1300	200	45	65	22

ISO 22768 – c

*Suscettibile di variazione – *subject to variation*