


AN30 – SS

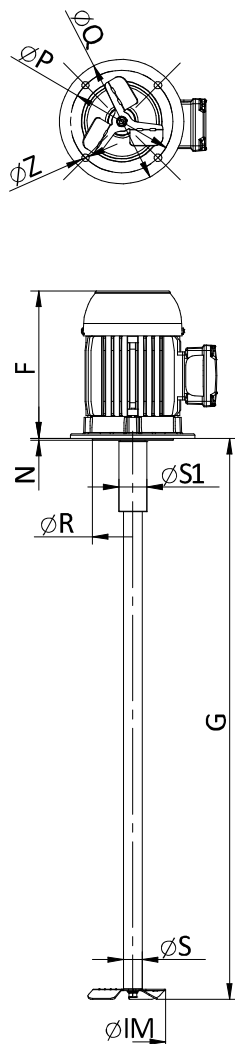

Motore – *Motor*

kW	Pole s	IEC Frame	rpm	F*	N	ØP	ØQ	ØR	ØZ *	kg*
0,5			145	24	3,	16	20	13		
5	4	80	0	0	5	5	0	0	12	15
0,7			145	24	3,	16	20	13		
5	4	80	0	0	5	5	0	0	12	15
0,3				24	3,	16	20	13		10,
7	6	80	950	0	5	5	0	0	12	5
0,5				24	3,	16	20	13		
5	6	80	950	0	5	5	0	0	12	14
0,1				24	3,	16	20	13		11,
8	8	80	700	0	5	5	0	0	12	5
0,2				24	3,	16	20	13		13,
5	8	80	700	0	5	5	0	0	12	5

IEC 72 – 1


Aggitatore – *Mixer*

Poles	G _{min}	G _{max} 50Hz	G _{max} 60Hz	ØIM	ØS	ØS1	kg*
4	250	850	750	132	30	45	6
6	250	1000	900	132	30	45	6,5
8	250	1100	1050	132	30	45	7,5

ISO 22768 – c

*Suscettibile di variazione – *subject to variation*

AN30 – SS

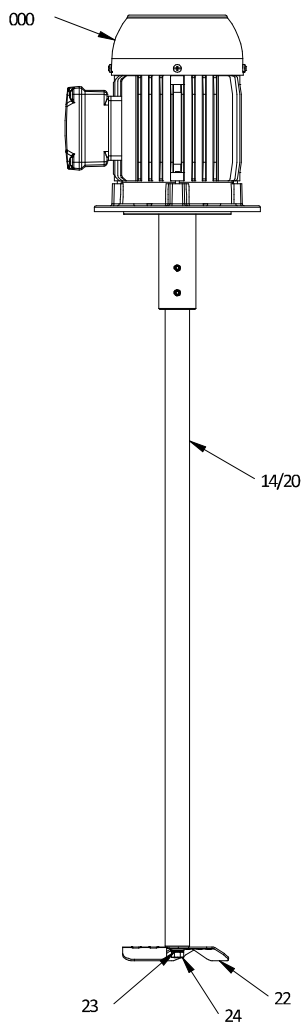

Codice <i>Part-No.</i>	Denominazione <i>Designation</i>	Materiali <i>Materials</i>	Qt.
000	Motore <i>Motor</i>	-	1
14/20	Albero completo <i>Complete shaft</i>	1.4301	1
22	Girante <i>Impeller</i>	1.4301	1
23	Rondella girante <i>Impeller washer</i>	A2	1
24	Dado girante <i>Impeller nut</i>	A2	1