


AN40 – SS

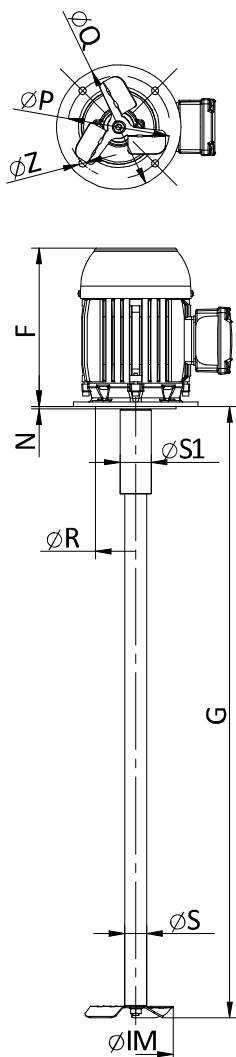

Motore – Motor

kW	Poles	IEC Frame	rpm	F*	N	ØP	ØQ	ØR	ØZ*	kg*
1,1	4	90S	1450	260	3,5	165	200	130	12	21
1,5	4	90L	1450	280	3,5	165	200	130	12	22
0,75	6	90S	950	260	3,5	165	200	130	12	19
1,1	6	90L	950	280	3,5	165	200	130	12	23
0,37	8	90S	700	260	3,5	165	200	130	12	18
0,55	8	90L	700	280	3,5	165	200	130	12	22

IEC 72 – 1


Agitatore – Mixer

Poles	G _{min}	G _{max} 50Hz	G _{max} 60Hz	ØIM	ØS	ØS1	kg*
4	300	900	800	150	35	50	8,5
6	300	1100	1000	150	35	50	10
8	300	1250	1150	150	35	50	10,5

ISO 22768 – c

*Suscettibile di variazione – *subject to variation*

AN40 – SS

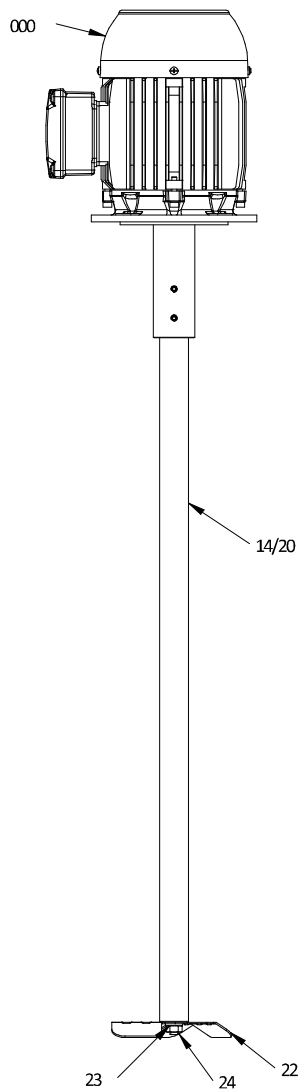

Codice <i>Part-No.</i>	Denominazione <i>Designation</i>	Materiali <i>Materials</i>	Qt.
000	Motore <i>Motor</i>	-	1
14/20	Albero completo <i>Complete shaft</i>	1.4301	1
22	Girante <i>Impeller</i>	1.4301	1
23	Rondella girante <i>Impeller washer</i>	A2	1
24	Dado girante <i>Impeller nut</i>	A2	1