


AR30 – SS

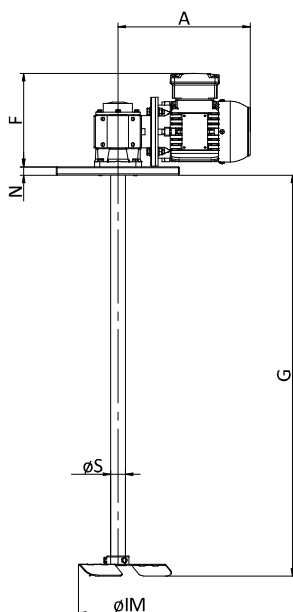


Motoriduttore – *Gearmotor*

Motor			Gear reducer						
kW	Poles	IEC Frame		i ¹	rpm ²	A*	F*	kg*	
0,12	4	63	worm gear	13	108	270	190	12	
0,18	4	63	worm gear	13	108	270	190	12,5	
0,12	6	63	worm gear	13	70	270	190	12.5	

¹ i: rapporto di trasmissione - *transmission ratio*

² ogni altra velocità è possibile su richiesta – *any other speed is available on request*

IEC 72 – 1



Agitatore – *Mixer*


Poles	G _{min}	G _{max}	ØIM ³	N	P	R	ØS	ØZ	kg*	
4	250	1000	200	15	250	220	30	10,5	12-30	
6	250	1500	200	15	250	220	30	10,5	12-30	

³ altri diametri su richiesta – *other diameter on request*

ISO 22768 – c

*Suscettibile di variazione – *subject to variation*

AR30 – SS

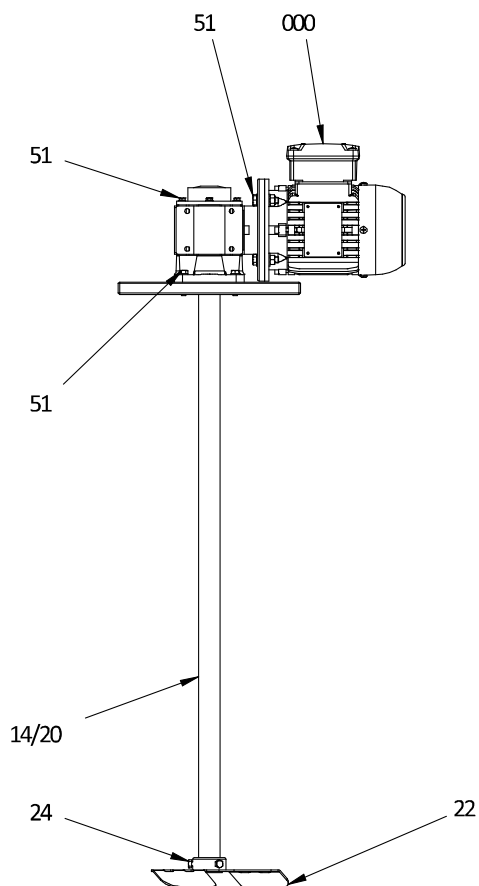

Codice <i>Part-No.</i>	Denominazione <i>Designation</i>	Materiali <i>Materials</i>	Qt.
000	Motoriduttore <i>Gearmotor</i>	-	1
02	Flangia di appoggio <i>Support plate</i>	PVC	1
14/20	Albero completo <i>Complete shaft</i>	SS	1
22	Girante <i>Impeller</i>	SS	1
24	Dado girante <i>Impeller nut</i>	SS	1
51	Serie Bulloneria/Rondelle (**) <i>Nuts/Bolts/Washers Set (**)</i>	SS	1