


AR50 – SS

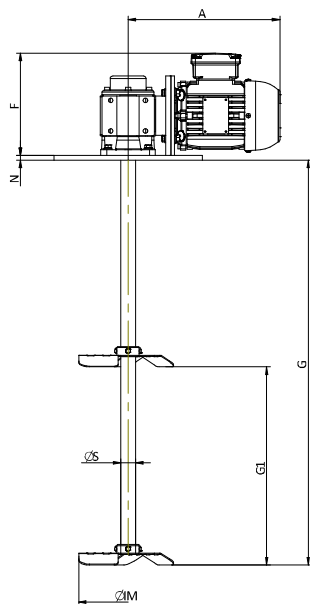


Motoriduttore – *Gearmotor*

Motor			Gear reducer						
kW	Poles	IEC Frame		i ¹	rpm ²	A*	F*	kg*	
0,25	4	90S	worm gear	13	108	310	210	13	
0,37	4	90L	worm gear	13	108	310	210	15	
0,18	6	90S	worm gear	13	70	310	210	16	
0,25	6	90L	worm gear	13	70	310	210	16	

¹ i: rapporto di trasmissione - *transmission ratio*

² ogni altra velocità è possibile su richiesta – *any other speed is available on request*

IEC 72 – 1

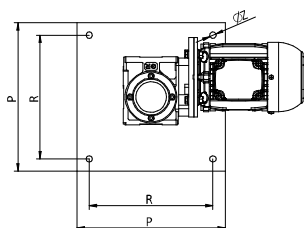

Agitatore – *Mixer*


Poles	G _{min}	G _{max}	ØIM ³	N	P	R	ØS	ØZ	kg*
4	500	1500	200	15	300	250	30	12,5	12-30
6	500	2000	200	15	300	250	30	12,5	12-30

³ altri diametri su richiesta – *other diameter on request*

ISO 22768 – c

*Suscettibile di variazione – *subject to variation*

AR50 – SS

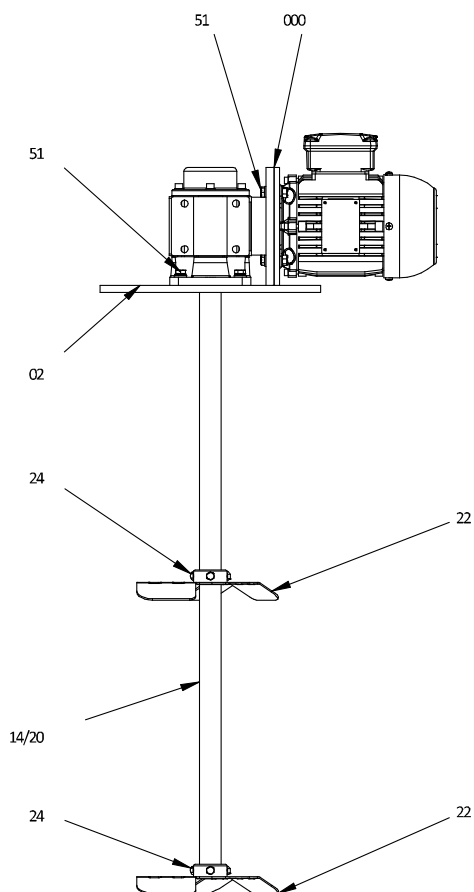

Codice <i>Part-No.</i>	Denominazione <i>Designation</i>	Materiali <i>Materials</i>	Qt.
000	Motoriduttore <i>Gearmotor</i>	-	1
02	Flangia di appoggio <i>Support plate</i>	SS	1
14/20	Albero completo <i>Complete shaft</i>	SS	1
22	Girante <i>Impeller</i>	SS	1
24	Dado girante <i>Impeller nut</i>	SS	1