


OA50 – PP

Flangia libera – *Backing ring*

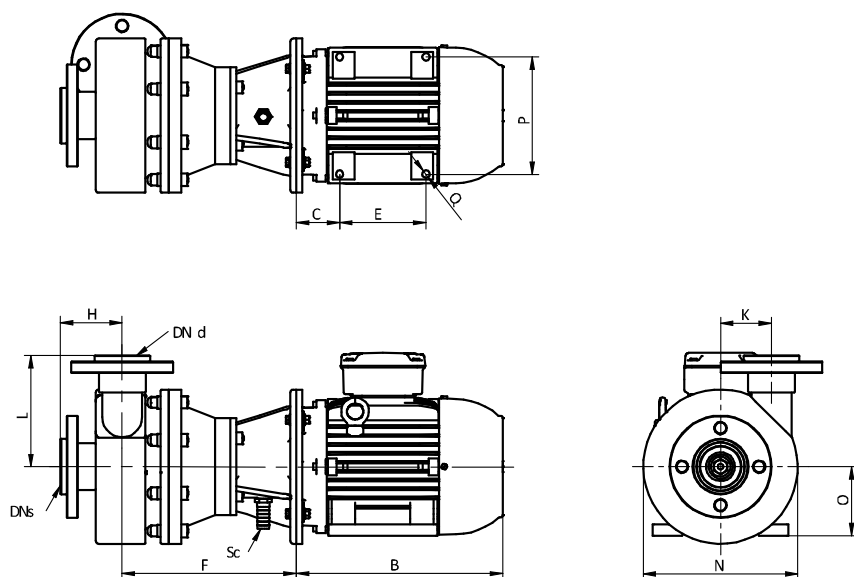

Motore – *Motor*

Motore kW	Poles	IEC Frame	B*	C	E	O	P	Q	kg*
3	2	100L	315	63	140	100	160	12	M10 32
4	2	112M	330	70	140	112	190	12	M10 41

IEC 72 – 1

*Dimensioni e peso del motore suscettibili di variazione – *Dimensions and weight of the motor subject to variations*

Pompa – *Pump*

Motore kW	Poles	IEC Frame	K	F	N	Sc**	kg*
3	2	100L	82.5	282	250	Ø20	
4	2	112M	82.5	282	250	Ø20	

ISO 22768 – c

*Peso della pompa suscettibile di variazione – *Weight of the pump are subject to variations*

** Portagomma di drenaggio in caso di rottura della tenuta meccanica - *Hose drain in case of failure of the mechanical*

Raccordi – *Nozzles*

Flangia libera – *Backing ring*

	H	DNs	L	DNd
Aspirazione - <i>Suction</i>	100	D63 DN50		
Mandata - <i>Delivery</i>			180	D63 DN50
DIN 2501				