

Pompa centrifuga orizzontale monoblocco con camera di autoadescamento e valvola di galleggiamento, girante sospesa aperta.

Close-coupled horizontal centrifugal pump, end suction with sel-priming chamber and float valve; open overhung impeller


Motore elettrico trifase CVE

Three-phases electric motor TEFC

2800 rpm - IP55 - F/B Insulation class - Volt 400/430 -230/260 Hz 50

PRESTAZIONI – PERFORMANCES – DONNEES

Type	m w.c.	Prevalenza – Head – Hauteur de refoulement										max suction
		0	2	4	5	6	8	10	12	14	15	
PA20 - kW 0,25/0,37	Portata – Flow l/min	60	50	40	5	-	-	-	-	-	-	1.5 m

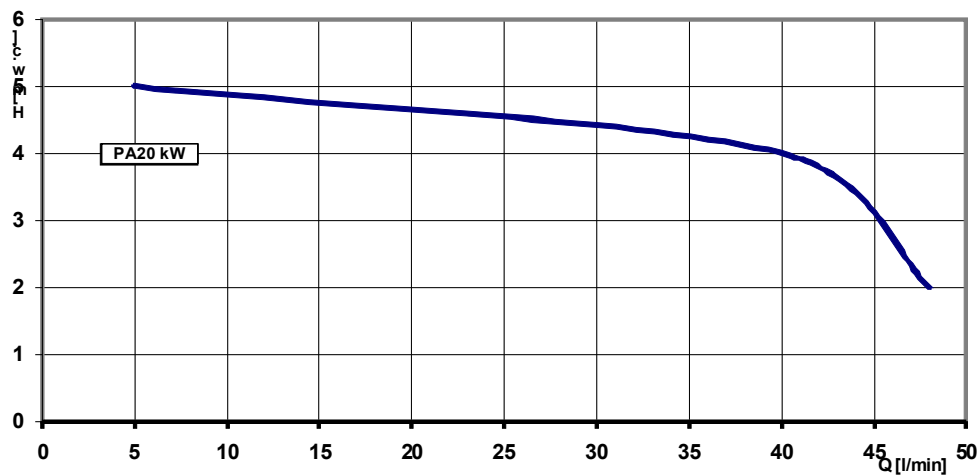

Pompa centrifuga orizzontale monoblocco con camera di autoadescamento e valvola di galleggiamento, girante sospesa aperta.

Close-coupled horizontal centrifugal pump, end suction with sel-priming chamber and float valve; open overhung impeller

Motore elettrico trifase CVE


Three-phases electric motor TEFC

2800 rpm - IP55 - F/B Insulation class - Volt 400/430 -230/260 Hz 50

PRESTAZIONI – PERFORMANCES – DONNEES

Type	H = m w.c.	Prevalenza – Head – Hauteur de refoulement										max suction
		0	2	4	5	6	8	10	12	14	15	
PA30 - kW 1,1	Portata – Flow l/min	160	155	150	140	135	130	105	65	10	-	3 m

b

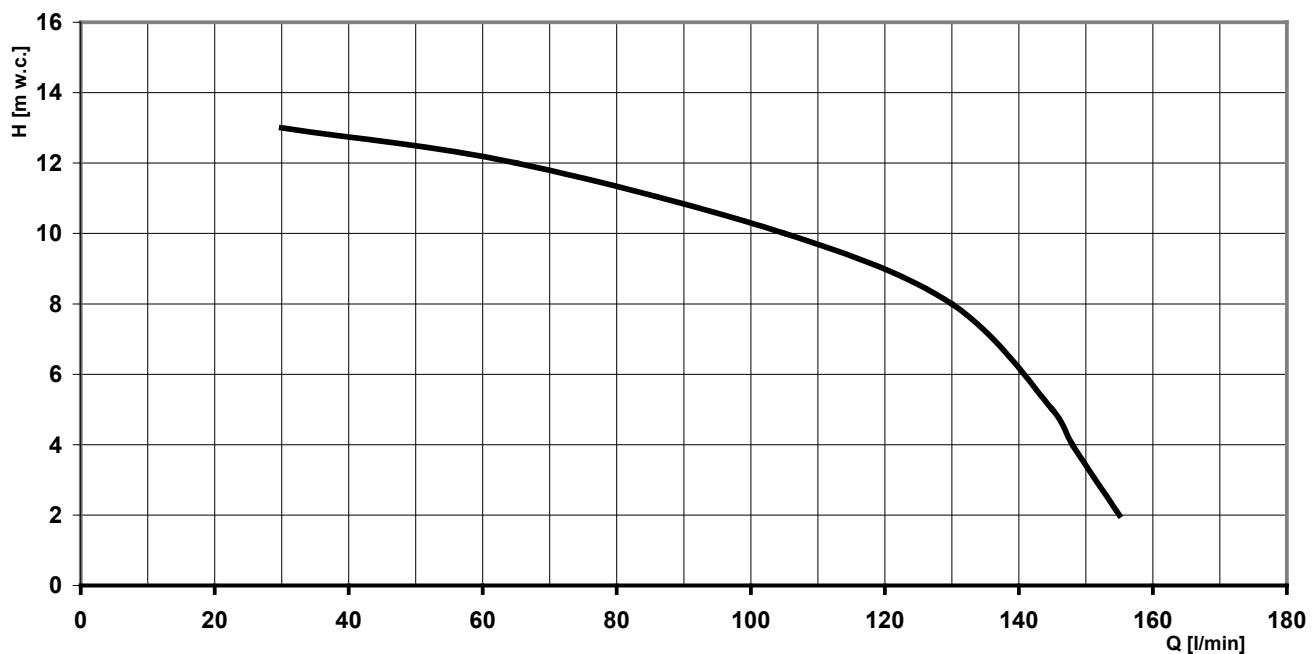

Pompa centrifuga orizzontale monoblocco con camera di autoadescamento e valvola di galleggiamento, girante sospesa aperta.

Close-coupled horizontal centrifugal pump, end suction with sel-priming chamber and float valve; open overhung impeller

Motore elettrico trifase CVE

Three-phases electric motor TEFC

2800 rpm - IP55 - F/B Insulation class - Volt 400/430 -230/260 Hz 50

PRESTAZIONI – PERFORMANCES – DONNEES

Type	m w.c.	Prevalenza – Head – Hauteur de refoulement										max suction
		0	2	4	5	6	8	10	12	14	15	
PA40 - kW 1,5	Portata – Flow l/min	280	260	235	220	210	180	150	110	50	35	4 m

